

AVerVision SPB350+

Designed Simply for Professionals

Greater Details, Better Images

- 5-megapixel sensor provides premium image quality
- Advanced 160X Zoom with quick Auto Focus
- 30fps allows for real-time live video streaming
- Built-in memory capacity for 240 images



Product Specifications & Features

Image / Video

Image Sensor	1/2.5" CMOS Color Image Sensor
Total Pixels	5M Pixels
Output Resolution	HD1080p (1920x1080)
Zoom	160X Total Zoom (20X AVer® Optical Zoom* + 8X Digital Zoom)
Frame Rate	30fps (Max.)
Focus	Auto / Manual
Shooting Area	300 x 225 mm (A4 Landscape)

Function

Image Rotation	Electronic Rotation 0° / 90° / 180° / 270°
Image Storage	Built-in Memory (Max: 240; up to 2M each) SD Card Slot (Max: 2GB)
On-Screen Display (OSD)	Yes
Image Effects	Color / B&W / Negative / Mirror / Freeze
Image Adjust (White Balance / Exposure / Night View)	Auto / Manual
Presentation Tools	Yes (Spotlight and Visor)
Split Screen	Yes (Vertical & Horizontal)
Picture-in-Picture	Yes
Display Mode	Text / Graphics / High Frame / Microscope
Capture Mode	Single / Continuous
User Profile	Yes
Timer	Yes
Flicker Filter Control	Yes (2 Levels)
Remote Control	Yes (with Laser Pointer)

* 20X AVer® Optical Zoom (12X Optical Zoom + 1.66X AVerZoom™)



Connectivity

DVI-I Output	Yes
RGB Input	Yes (15-Pins D-sub, PC Pass Through) x 2
RGB Output	Yes (15-Pins D-sub)
S-Video Output	Yes (NTSC or PAL)
Composite Video Output	Yes
RS-232 Port	Yes (9-Pins D-sub)
USB 2.0 Port	Yes

Lighting

Light Source	Embedded LED Lamp
Light Box	Embedded (5" x 4")


Others

Dimension (W x H x D)	Operating: 380 x 505 x 480 mm Folded: 380 x 150 x 480 mm
Net Weight	5.6 Kg (12.32 lbs)
Power Consumption	16W (Lamp On) ; 13.6W (Lamp Off)
Certifications	FCC, CE

Package Content

AVerVision SPB350+ Unit	Power Adapter
Remote Control (Batteries included)	Power Cord
Manual CD	RCA Cable
Dust Cover	S-Video Cable
Anti-glare Sheet	RGB Cable
A+ Interactive Software CD	USB Cable
Quick Guide	

Panel

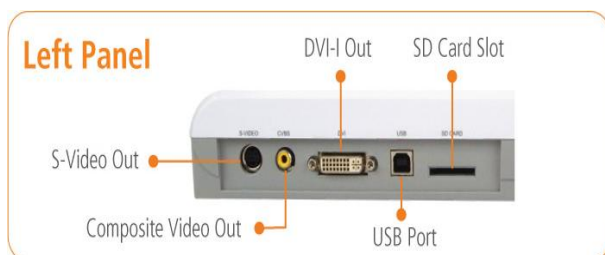

Optional Accessory



Microscope Adapter

All-New A+ Interactive Software

AVer+ software offers a brand new user interface that allows you to draw and make notes on top of images, record video and audio, set up a multiple-user network, and much more.

System Requirements

Windows® XP

- Intel® Pentium III 1 GHz or later x86 processor (Intel® Core 2 Duo 1.66GHz recommended)
- 512 MB of RAM (1 GB recommended)
- 100 MB free hard disk space for basic installation (without content in Gallery)

Windows® Vista and 7

- Intel® Core Duo 1.5 GHz or later x86 processor (Intel® Core 2 Duo 1.66GHz recommended)
- 1 GB of RAM (2 GB recommended)
- 100 MB free hard disk space for basic installation (without content in Gallery)

